


PADMOUNT TYPE ONAN/PROV. ONAF 60Hz, 65°C

3 PH. 2500/PROV. 3333 kVA SERIAL No G10995-1
 IMPEDANCE AT 85°C 2.4% % VOL OF COOLANT 2915 L
 INSULATION LEVEL 150 kV BIL TOTAL MASS 7180 kg
 H.V. 27600Y/16000 V X [] V
 L.V. 600Y/347 V X [] V
 COOLANT NON-PCB, CLASS B, TYPE I, MINERAL OIL

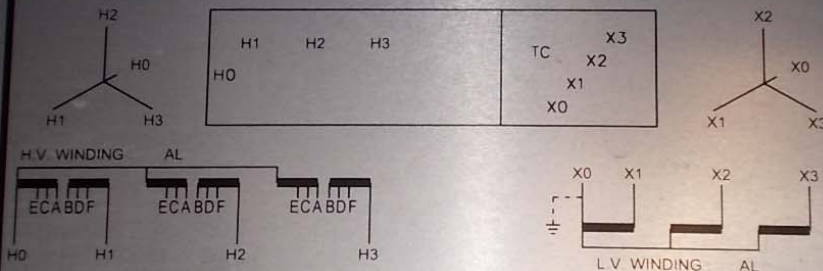

OFF-CIRCUIT TAPSWITCH CONNECTIONS (TC)					
POS	A	B	C	D	E
% V	105.0%	102.5%	100.0%	97.5%	95.0%
VOLTAGE	28980	28290	27600	26910	26220

WARNING! DE-ENERGIZE TRANSFORMER BEFORE CHANGING TAPSWITCH POSITION

P.O. No. 11047 DATE OF MANUFACTURE 07 2000

SPEC. No. - REF. No. 1103B3831

G2102A4152-R0
BUILT TO CSA C227.2-88

