CARTON

905 294 8736

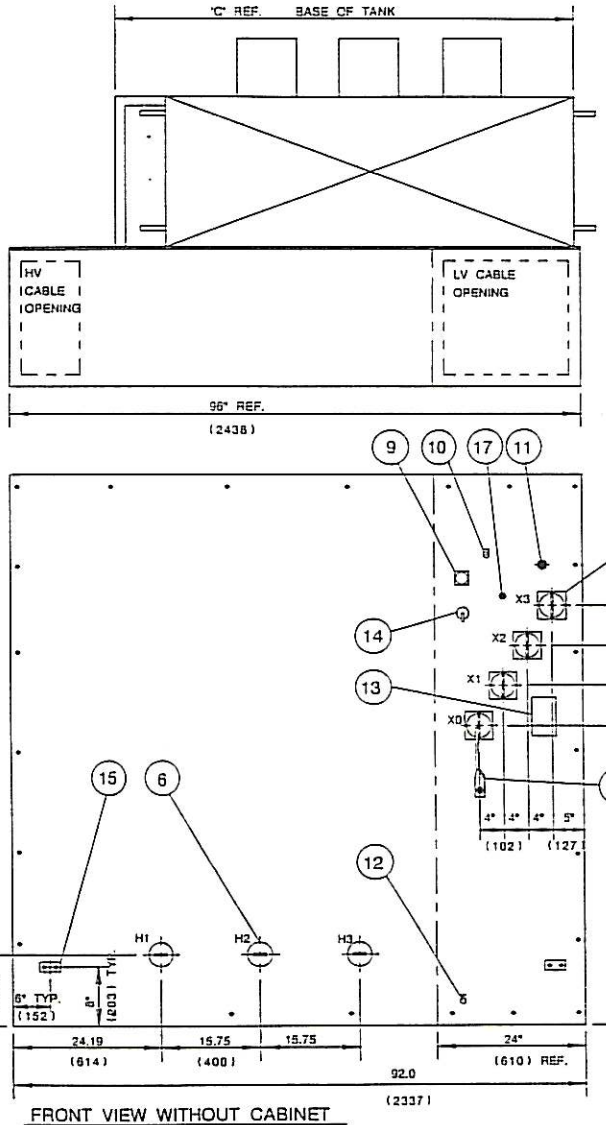

FRONT VIEW WITHOUT CABINET

KVA	TOTAL MASS (INCL. CAB.) LBS. (KG)	OIL QTY. GALS (L)	RAD SECS.	'A' IN(MM)	'B' IN(MM)	'C' IN(MM)
1500	14,400 LBS. (6545 KG)	560 GALS (2546 L)	22	40.5 (1028)	25.5 (648)	72" (1829)
2000	16.500	600	32	40	23J	72

ITEM	DESCRIPTION
	TLO 15 GA. CABINET/SWITCH/FUSE/COMP. TO BE SUPPLIED BY MARKHAM ELECTRIC
1	TRANSFORMER TANK
2	WELDED COVER
3	RADIATOR
4	LIFTING LUG
5	JACKING AREA
6	HV BUSHING (2 HOLE SPADE)
7	LV BUSHING SPADE
8	GROUND STRAP (X0)
9	OIL LEVEL GAUGE
10	PRESSURE RELIEF DEVICE
11	OIL FILL PLUG
12	OIL DRAIN VALVE
13	NAMEPLATE
14	TAP SWITCH
15	GROUNDING PAD
16	
17	THERMOMETER WELL QUALITROL 167-50-3D
18	
19	
20	

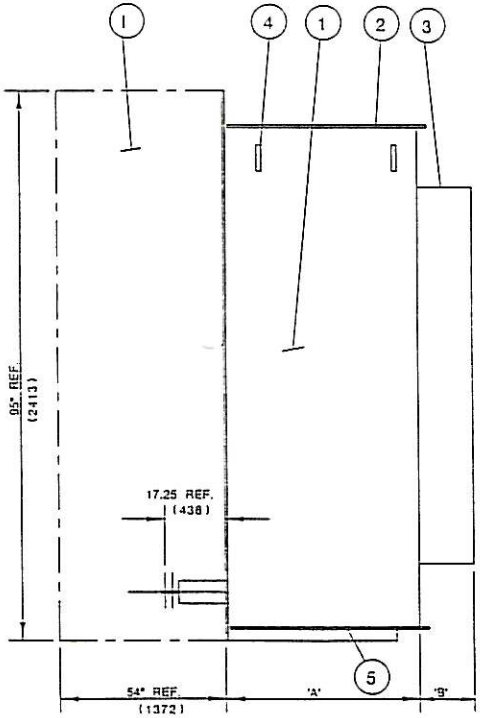

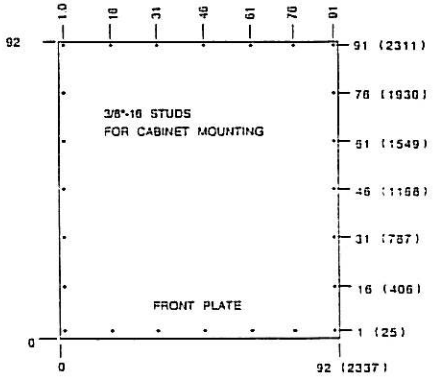

REVISIONS

P.O.# 14135-7222-6

YB399

Reviewed by LB Approved

27600 A

6007/347

DIMENSIONS AND TOLERANCES ARE IN INCHES	CARTE INTERNATIONAL INC. WINNIPEG, CANADA		
SPEC.: C227.2 & MARKHAM	TITLE: 3PH. PRIMARY SERVICE ENTRANCE TRANSFORMER 25KV		
MAT'L: WEIGHT OF CABINET & SWITCH ASSEMBLY 2000 LBS.	DWG. RD	CH'KD.	APP'D.
	DATE 93/10/28		
	SCALE NTS	PR 5121	B 00